

# Sail Away

designed by Debby Kratovil

featuring the Fresh Catch collection by Windham Fabrics

SIZE: 47-1/2" x 47-1/2"

**PATTERN REQUIRES APPLIQUÉ TECHNIQUE.**

FREE  
PROJECT




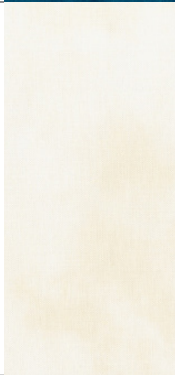






THIS IS A DIGITAL REPRESENTATION OF THE QUILT TOP, FABRIC MAY VARY.

**PLEASE NOTE:** BEFORE MAKING YOUR PROJECT, CHECK FOR ANY PATTERN UPDATES AT [WINDHAMFABRICS.COM](http://WINDHAMFABRICS.COM)'S FREE PROJECTS SECTION.



# Sail Away

KEY	FABRIC	SKU	YD	CUTTING INSTRUCTIONS
A		37098-13 Saffron	3/8	<p><b>Star Template Appliqué:</b> (5)</p> <p><b>Mast:</b> (1) 2-1/8" x WOF strip; subcut (8) 2-1/8" squares and cut each square once diagonally in half.</p> <p>(1) 5-1/2" x WOF strip; subcut (4) of each right and reverse sides of <b>Template #2</b>. Refer to diagram on template page.</p>
B		37098-16 Cherry	1/4	<p>(1) 4" x WOF strip; subcut (5) 4" squares.</p> <p><b>Boat:</b> 1-3/4" x WOF strip; subcut (4) 1-3/4" x 5-1/2" pieces.</p>
C		37098-28 Dark Teal	3/8	<p>(1) 5-1/2" x WOF strip; subcut (4) 5-1/2" squares and (4) 1-3/4" x 5-1/2" pieces (<b>Water Strip</b>).</p> <p>(1) 4" x WOF strip; subcut (10) 4" squares and cut each square once diagonally in half.</p>
D		37098-56 Cloud	3/4	<p><b>Achor Template Appliqué:</b> (4)</p> <p><b>Sides:</b> (1) 1-3/4" x WOF strip; subcut (8) 1-3/4" x 3" pieces and (8) 1-1/2" squares.</p> <p><b>Mast Part:</b> (1) 2-1/8" x WOF strip; subcut (8) 2-1/8" squares and cut each square once diagonally in half.</p> <p>(2) 5" x WOF strip; subcut (20) of each right and reverse sides of <b>Template #2</b>. Refer to diagram on template page.</p> <p>(1) 4-3/8" x WOF strip; subcut into (8) 4-3/8" squares and cut each once diagonally in half.</p>
E		51074-2 White	1-3/4	<p><b>Outer Border:</b></p> <p>(2) 5-1/2" x WOF strips. Piece strips and subcut (2) 5-1/2" x 37-1/2" strips.</p> <p>(2) 5-1/2" x LOF strips. Piece strips and subcut (2) 5-1/2" x 47-1/2" strips.</p>
F		51075-1 Blue	1/2	(2) 5-7/8" x WOF strips. Subcut (8) 5-7/8" squares.
G		51076-4 Red	2/3	<p><b>Inner Border:</b> (4) 1-1/2" x WOF strips. Piece strips and subcut (2) 37-1/2" and (2) 35-1/2" lengths.</p> <p><b>Binding:</b> (5) 2-1/4" x WOF strips.</p>
H		51077-1 Blue	3/8	(2) 5" x WOF strips; subcut (12) of <b>Template #1</b> . Refer to diagram on template page.
		Backing	2-1/4	Fabric of choice.
		Batting		54" square

**Other Supplies:** Paper-backed fusible web for appliqués.





# Sail Away

## DIAMOND-IN-RECTANGLE BLOCKS

1. Sew (2) **D** Template #2 pieces to opposite sides of (1) **H** Template #1 piece and press seams out. Sew (2) Template #2 reversed **D** pieces to the remaining sides of the Template #1 piece and press seams out. Make (8) **D/H** Block units measuring 10-1/2" x 5-1/2".
2. In the same way, make a total of (4) **H/A/D** Diamond Blocks as shown.

Step 1



Make (8)



Step 2



Measures: 10-1/2" x 5-1/2"

## ANCHOR BLOCKS

3. Prepare anchor appliqué pieces using method of choice. Appliqué (1) anchor shape onto (1) 5-1/2" **C** square.
4. Press (4) 4-3/8" **D** triangles in half to find the center of the long edge. Mark the center edges of the anchor square. Matching center points, sew **D** triangles to opposite sides of the anchor square and press open. Sew **D** triangles to the remaining sides of the anchor square.
5. Cut (1) 5-7/8" **F** square diagonally in half from lower left to upper right. Cut (1) 5-7/8" **F** square diagonally in half from upper left to lower right.
6. In the same way, add 5-7/8" **F** triangles to the unit from Step 4. Square up to measure 10-1/2" square, making sure there's 1/4" past the **D** points. Make (4) 10-1/2" square Anchor Blocks.

Step 3



Step 4



Step 6





Make (4)



Square up to 10-1/2"

Step 5






# Sail Away



## STAR BLOCKS

7. Prepare star appliqué pieces using method of choice. Appliqué (1) star shape onto (1) **B** 4" square.
8. Sew (4) **C** 4" half-square triangles to opposite sides of the star square and press open. Square up to measure 5-1/2", ensure there's 1/4" past the **C** points. Make (5) Star Blocks.

Step 7



Step 8



Make 5

Square up to measure 5-1/2"


## BOAT BLOCKS

9. Layer (1) **A** 2-1/8" triangle right sides together with (1) **D** 2-1/8" triangle. Stitch along the long edge to make (1) **A/D** HST unit. Trim to measure 1-3/4" square. Make (4) **A/D** HST units.
10. Lay out the (4) **A/D** HST units into (2) rows of (2) as shown. Sew into rows and join the rows. Sew 1-3/4" x 3-1/2" **D** pieces to opposite sides to make the boat sails.
11. Draw diagonal lines on the wrong side of (2) **D** 1-3/4" squares. Position the marked squares on both bottom corners of (1) **B** 1-3/4" x 5-1/2" piece. Stitch on the drawn lines, trim seam allowance to 1/4", and press open to create the boat unit.
12. Sew the **C** 1-3/4" x 5-1/2" piece and the boat sails to opposite long sides of the boat unit to make a 5-1/2" square boat block as shown. Make (4) Boat Blocks.

Step 9




Step 10

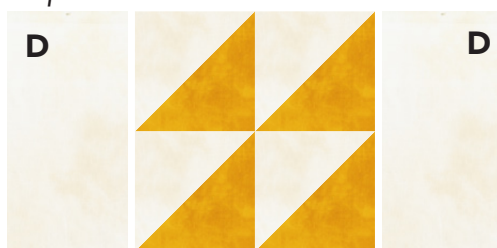


Step 12

Make (4)

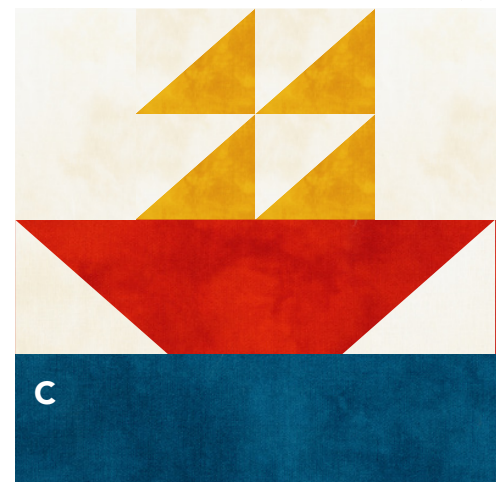

Square up to measure 5-1/2"

Step 11

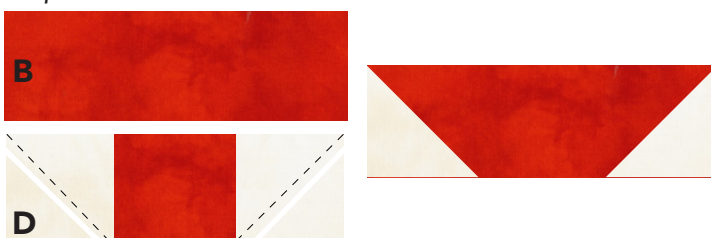






# Sail Away

## QUILT TOP ASSEMBLY

13. Lay out the (12) Diamond Blocks, (4) Anchor Blocks, (5) Star Blocks and (4) Boat Blocks into (5) rows of (5) blocks each. Sew the blocks into rows and join the rows to complete the 35-1/2" square quilt center.
14. **Inner Border #1.** Sew the **G** 1-1/2" x 35-1/2" strips to the top and bottom of the quilt center. Sew the **G** 1-1/2" x 37-1/2" strips to opposite sides.
15. **Outer Border #2.** Sew **E** 5-1/2" x 37-1/2" strips to the top and bottom of the quilt. Sew **E** 5-1/2" x 47-1/2" strips to opposite sides to complete the quilt top.

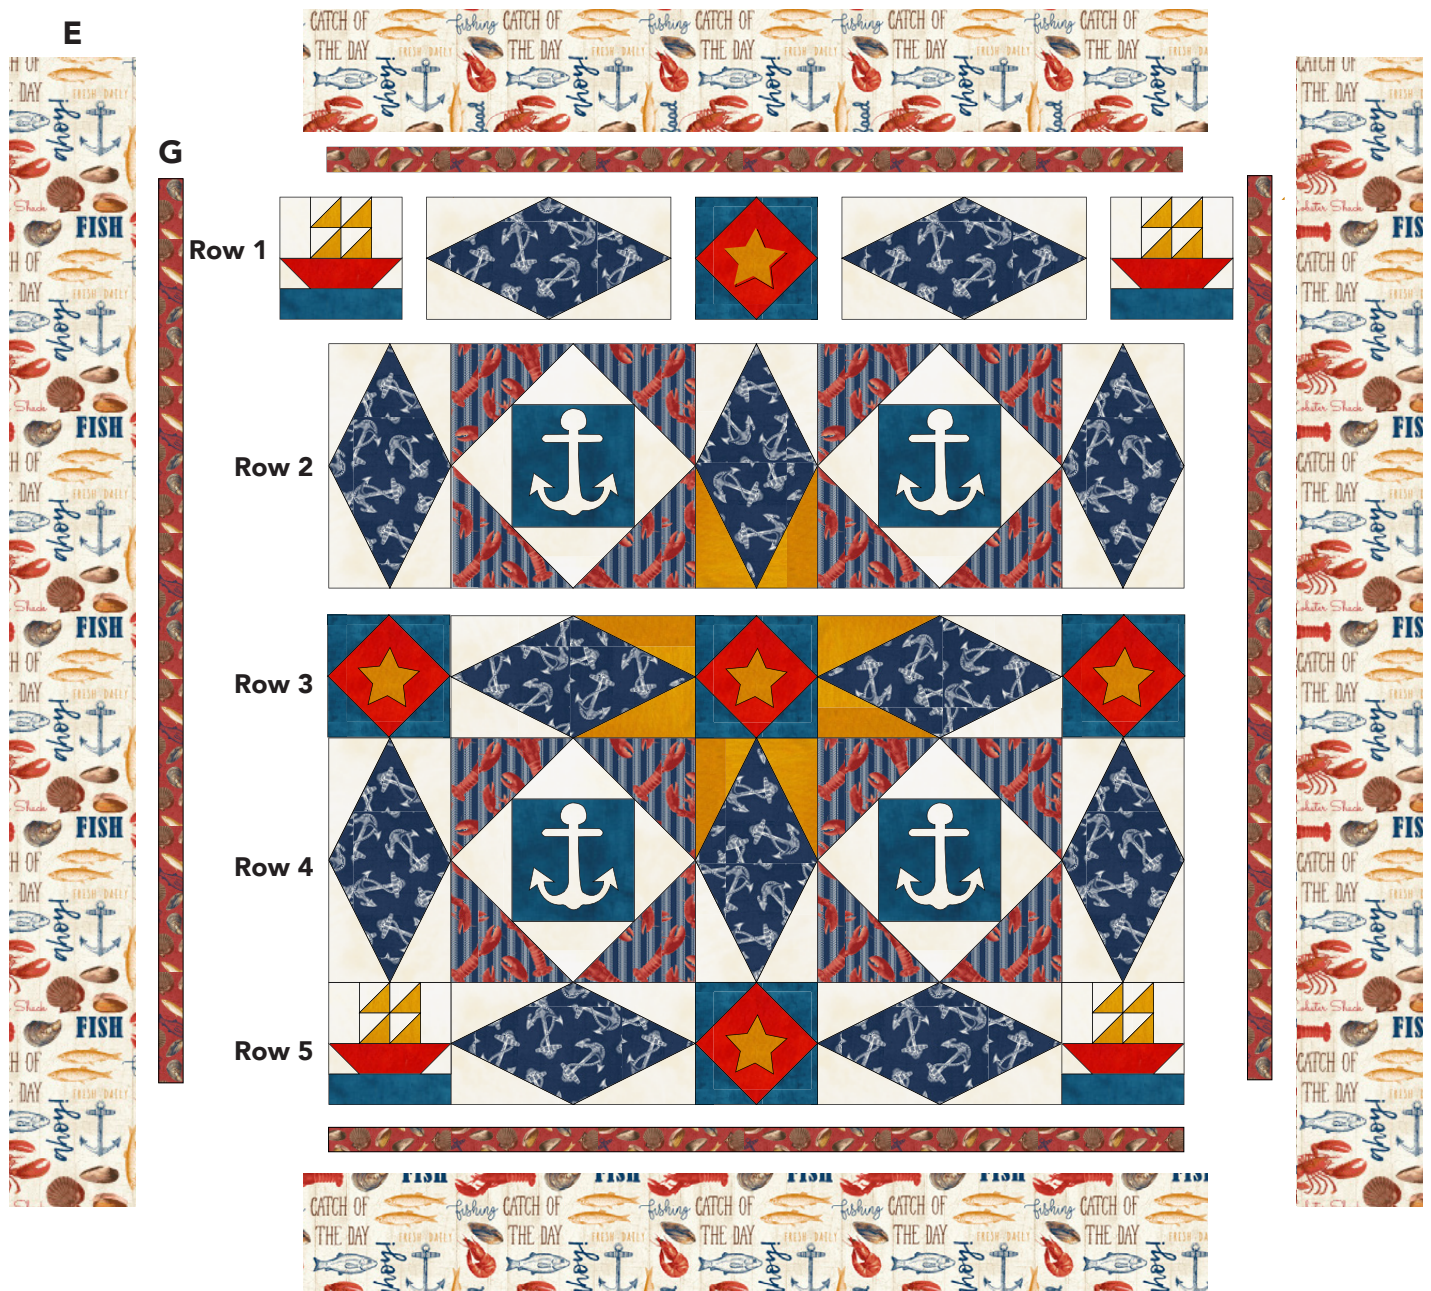


**FINISHING:** Layer quilt top, batting and backing together to form quilt sandwich. Baste and quilt as desired. Bind using **G** 2-1/4" strips.



PRINT TEMPLATES AT 100% SCALE

# Sail Away

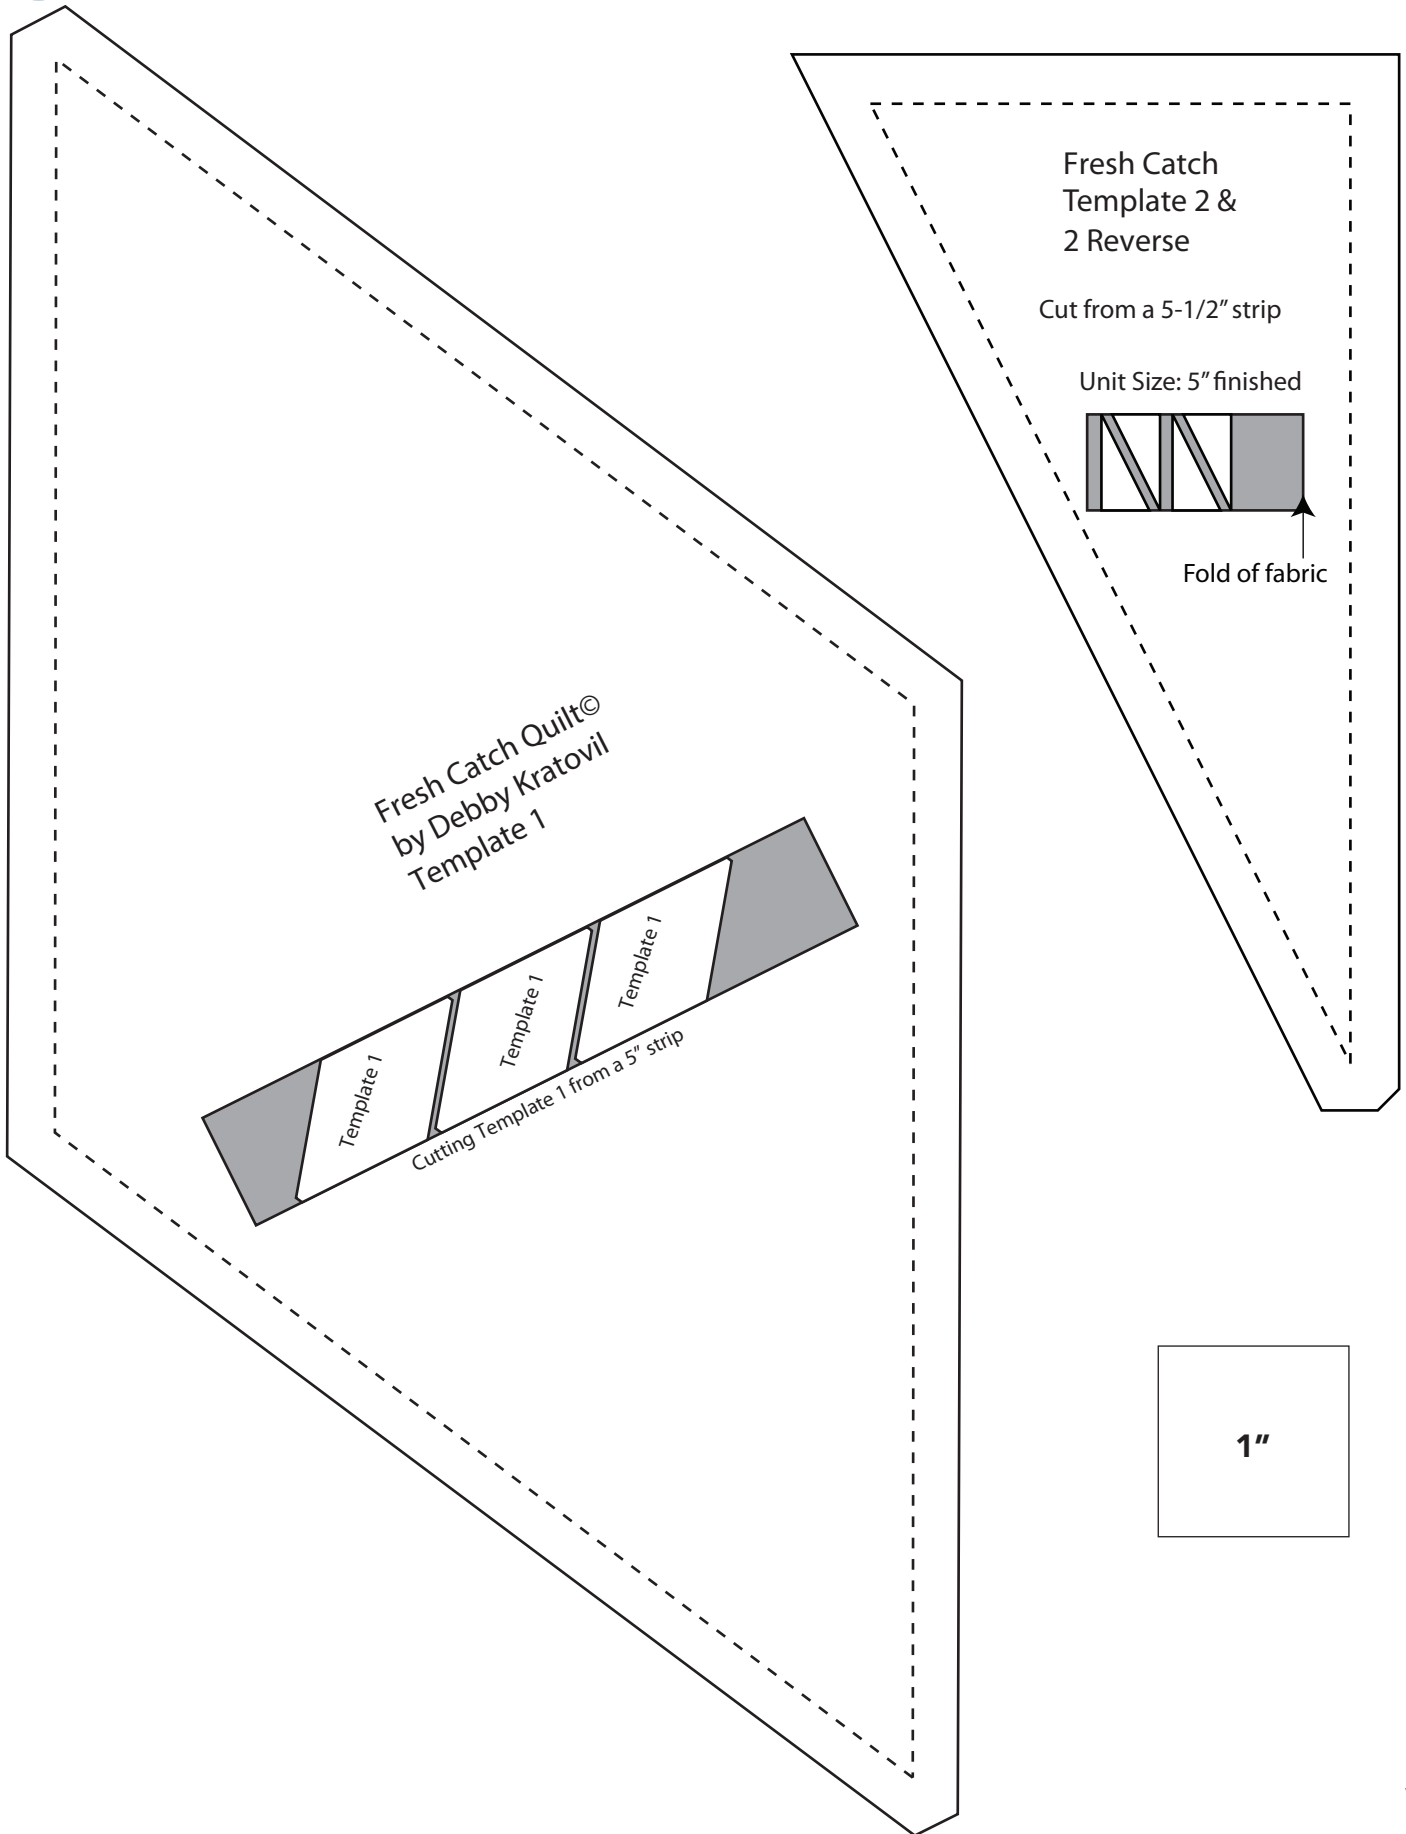



# Sail Away

## Star and Anchor Templates PRINT AT 100% SCALE

*For Turn Under Appliqué add 1/4" seam.*

*For Raw Edge Machine Appliqué, seams are not required.*

