

IN THE GROOVE

Pattern
TESTED

Designed by John Kubiniec of Big Rig Quilting
Featuring the Delight Collection by French Bull
Quilt Size:



Always look on our website before starting your project to see
if there are any updates or corrections

WINDHAM FABRICS

812 Jersey Ave ~ Jersey City, NJ 07310 ~ 201.659.0444 ~ FAX: 201.659.9719
www.windhamfabrics.com email: retail@windhamfabrics.com

IN THE GROOVE

Designed by John Kubinieć of Big Rig Quilting
Featuring the Delight Collection by French Bull
Quilt Size: 51" x 51"



35189-X



35192-5



35192-7



35191-3



35191-4

Fabric Requirements:

35189-X White multi floral design – 3/8 yard

35191-3 Green with white flowers – 1/2 yard

35191-4 Orange with white flowers – 1/2 yard

35192-7 Light blue with white swirls – 1/2 yard

35192-5 Black with white swirls – 1 yard

31835 Solid White 1 1/3 yards (from Windham Solids)

Backing Fabric - 3- 1/4 yards

Binding – 1/2 yard (29003 solid black fabric from Windham Solids or 35192-5 Black with White Swirls)

Cutting the Fabric

35189-X white multi-floral design

Cut 4 - 9 1/2 " x 9 1/2 " squares

35191-3 green with white flowers

Cut 10 - 5 1/2 " x 5 1/2 " squares

35191-4 orange with white flowers

Cut 8 - 5 1/2 " x 5 1/2 " squares

35192-7 light blue with white swirls

Cut 9 - 5 1/2 " x 5 1/2 " squares from each fabric

31835 – white

Cut 2 strips 5 1/2 x WOF . From these strips cut 9 - 5 1/2 " x 5 1/2 "

Cut 11 strips 2 1/2 x WOF – Cut 18 pieces - 2 1/2" x 9 1/2 " and 2 pieces 2 1/2" x 13 1/2 " – these will be used for the sashing strips. The remainder of these strips will be pieced together to create the long sashing between the rows.

35192-5 Black with white swirls

Cut 2 - 16" x 16" squares. Cut each of these squares in half on both diagonals creating 4 quarter-square triangles (A) from each square, for a total of 8 quarter square triangles.

These will be used for the setting triangles on the sides of the quilt




IN THE GROOVE

Page 2

35192-5 Black with white swirls (continued)

Cut 2 $9\frac{3}{4}$ " x $9\frac{3}{4}$ " squares. Cut each of these in half on the diagonal giving you 4 half-square triangles (B). These will be used for the setting triangles on the corners of the quilt.


From the remainder of the material cut 12 – $2\frac{1}{2}$ " x $2\frac{1}{2}$ " squares. These will be sewn to the end of the sashing strips to create half-square triangle ends.



Sewing Instructions for blocks and sashing strips

Take all of the $5\frac{1}{2}$ " x $5\frac{1}{2}$ " white green, blue, orange and white squares and sew them together according to the following instructions.

- 1) Take one green square and one white square, place right sides together and draw diagonal line on the back of one square. Sew quarter inch seam on both sides of the drawn line, then cut apart on the drawn line and press seams toward the green fabric. Repeat with four more pairs of green and white squares. Trim the squares so they measure 5" x 5" Repeat You will end up with 5 blocks consisting of one green and one white half-square triangle.

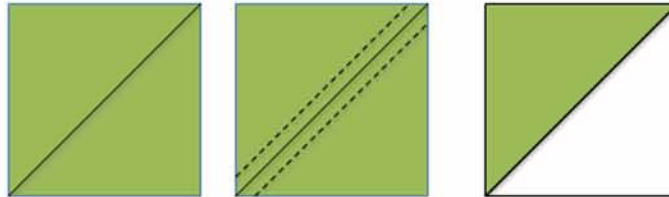


- 2) Take five green squares and five blue squares and repeat what you did in step # 1. You will end up with 5 blocks consisting of one green and one blue half-square triangle.
- 3) Take four orange squares and four white squares and repeat what you did in step # 1. You will end up with four blocks consisting of one orange and one white half-square triangle.
- 4) Take four orange squares and four blue squares and repeat what you did in step # 1. You will end up with four blocks consisting of one orange and one blue half-square triangle.
- 5) Take the green and white blocks and the green and blue blocks and sew them together to create the following block. Make 5. Repeat the process with the orange and white, and orange and blue blocks. Make 4.



IN THE GROOVE

Page 3

- 6) Take the two $2\frac{1}{2}$ " x $13\frac{1}{2}$ " white sashing strips and 4 of the $2\frac{1}{2}$ " x $2\frac{1}{2}$ " black squares. Draw a diagonal line on the back of the black squares. Place black square (right sides together) at each end of the sashing strip – being careful of the placement. Sew on the diagonal, trim and press towards the black.

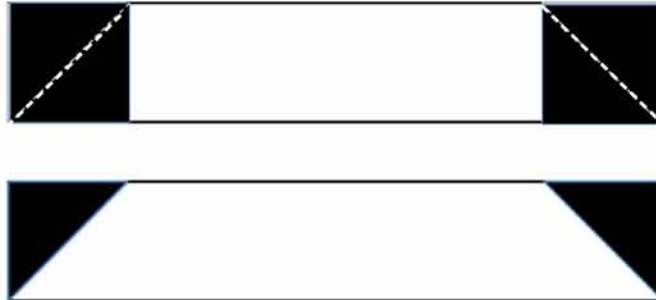

- 7) Take the remaining $2\frac{1}{2}$ " wide white strips and splice them together so that you can create two sashing strips - $2\frac{1}{2}$ " x $35\frac{1}{2}$ " and two sashing strips - $2\frac{1}{2}$ " x $57\frac{1}{2}$ ". Take the remaining eight $2\frac{1}{2}$ " black squares and draw a diagonal line on the back of the black squares. Place one square at each end of the sashing strip (right sides together) – being careful of the placement. Sew on the diagonal, trim and press towards the black.

Sewing the rows together.

The blocks are set on point so the rows need to be sewn together on the diagonal.

Upper Right Corner

- 1) Take the block with the green/white and green/blue half-square triangles, sew sashing strips ($2\frac{1}{2}$ " x $9\frac{1}{2}$ ") to either side of the block (see diagram for proper orientation of the block.) Add corner setting triangle (B) and then add side setting triangles (A). Repeat this process to create the lower left corner
- 2) Take two blocks with the orange/white and orange/blue half-square triangles, one of the $9\frac{1}{2}$ " x $9\frac{1}{2}$ " squares of the multi-color floral, and four sashing strips ($2\frac{1}{2}$ " x $9\frac{1}{2}$ "). Arrange the blocks and sashing strips according to the diagram and sew together. Sew one of the long sashing rows ($2\frac{1}{2}$ " x $35\frac{1}{2}$ ") to the top of this row. Add the two side setting triangles (A) to either end of this row. This will form the second row for the top right. Repeat this process for the second row on the lower left aligning the blocks and sashing strip according to the diagram.
- 3) Take the remaining blocks and sashing strips and sew the center row together according to the diagram. Add the long sashing strips ($2\frac{1}{2}$ " x $57\frac{1}{2}$ ") to either side of this row. Add the corner setting triangles (B) to the ends of this row.
- 4) Sew the rows together according to the diagram. Since there are no seams to match – take care when sewing the rows together so that the sashing strips (that run between the blocks) line up from row to row. When sewing, place the rows to be sew together right sides together. Align the rows so that the sashing strips that run between the blocks line up with one another. Pin in place at these points and then sew the row together.

Finishing

Create quilt sandwich (quilt top, batting, backing) and quilt and bind as desired. **ENJOY!**

IN THE GROOVE

Page 4

Assembly Diagram



For questions about this quilt,
please contact John Kubniec of Big Rig Quilting at:
bigrigquilting@gmail.com or visit his blog at:
www.bigrigquilting.blogspot.com

Be sure to visit www.windhamfabrics.com to see the complete collection
and to download this and other Free Projects

WINDHAM FABRICS